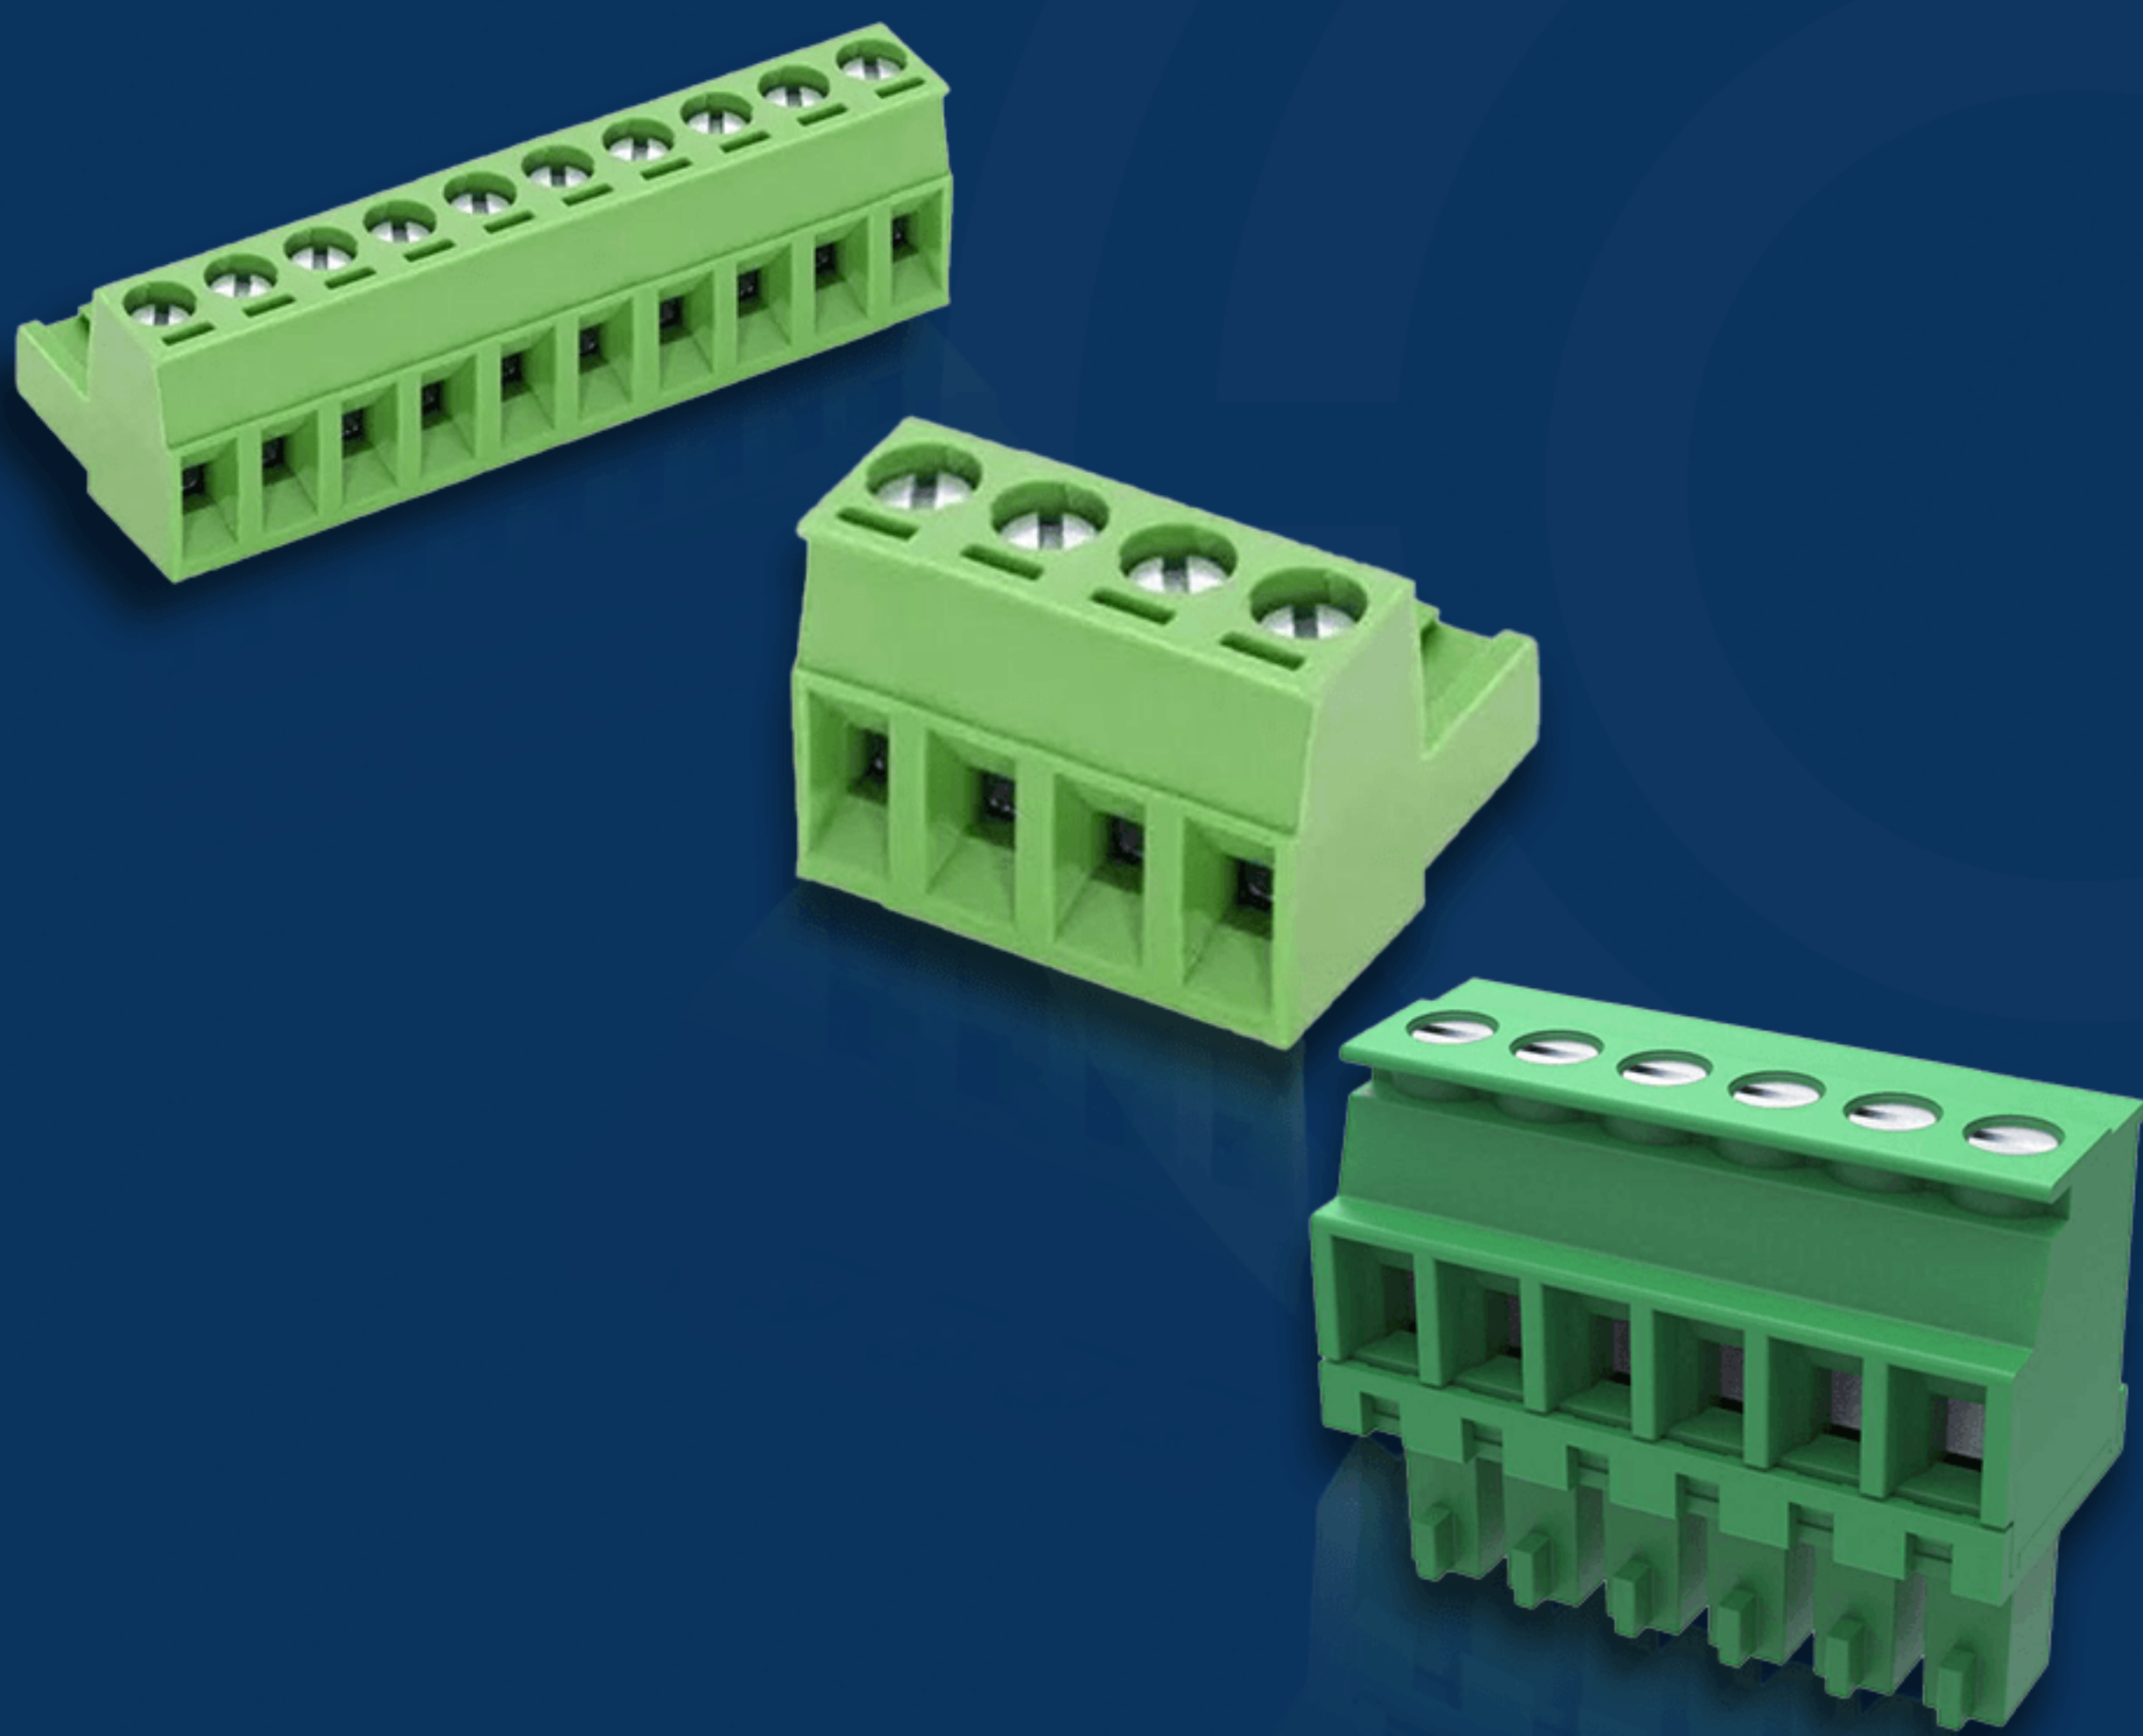


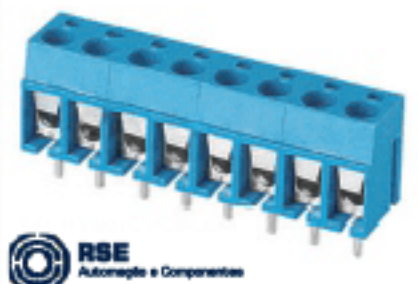
CATÁLOGO DE PRODUTOS RSE

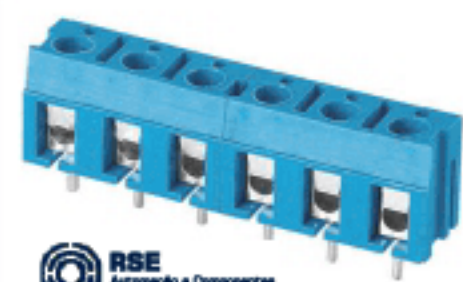
PRODUTO: **CONECTOR BLOCK**

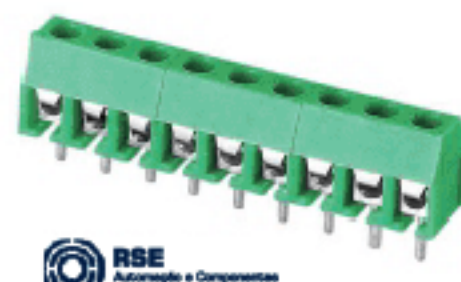
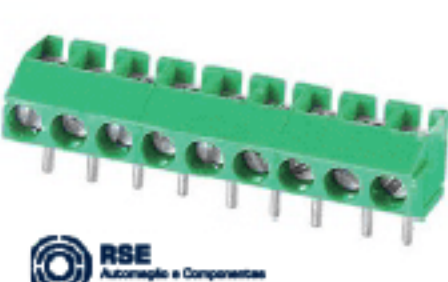


RSE
Automação e Componentes Eletrônicos

Bornes

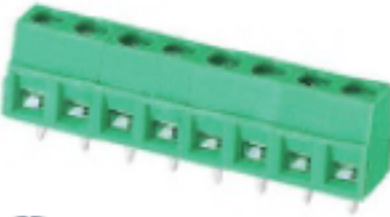
Product parameters					
Model	PCB WIRE GUARD TERMINAL BLOCKS	EX/JM301V-5.0	EX/JM301R-5.0	EX/JM306-5.0	EX/JM300V-5.0
Voltage		250V(UL)/250V(IEC)	250V(UL)/250V(IEC)	250V(UL)/250V(IEC)	250V(UL)/250V(IEC)
Current		16A(UL)/24A(IEC)	16A(UL)/24A(IEC)	16A(UL)/24A(IEC)	16A(UL)/17.5A(IEC)
Wire		22-14AWG,1.5mm ²	22-14AWG,1.5mm ²	22-14AWG,1.5mm ²	22-14AWG,2.5mm ²
Pritch		5.0mm	5.0mm	5.0mm	5.0mm
Poles		2-24P	2-24P	2-24P	2-24P

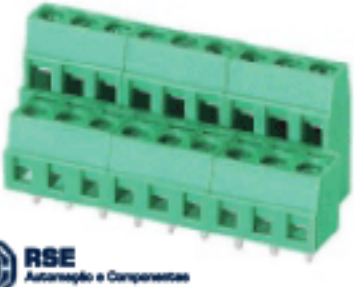
Product parameters					
Model	EX/JM300R-5.0	EX/JM305-5.0	EX/JM300V-7.5	EX/JM300R-7.5	EX/JM305-7.5
Voltage	250V(UL)/250V(IEC)	250V(UL)/250V(IEC)	250V(UL)/250V(IEC)	250V(UL)/250V(IEC)	250V(UL)/250V(IEC)
Current	16A(UL)/17.5A(IEC)	16A(UL)/17.5A(IEC)	16A(UL)/24A(IEC)	16A(UL)/24A(IEC)	16A(UL)/24A(IEC)
Wire	22-14AWG,2.5mm ²	22-14AWG,2.5mm ²	22-14AWG,2.5mm ²	22-14AWG,2.5mm ²	22-14AWG,2.5mm ²
Pritch	5.0mm	5.0mm	7.5mm	7.5mm	7.5mm
Poles	2-24P	2-24P	2-24P	2-24P	2-24P

Product parameters					
Model	EX/JM350V-3.5/3.96	EX/JM350R-3.5/3.96	EX/JM126V-5.0	EX/JM126R-5.0	EX/JM331-5.0
Voltage	300V(UL)/250V(IEC)	300V(UL)/250V(IEC)	300V(UL)/250V(IEC)	300V(UL)/250V(IEC)	300V(UL)/250V(IEC)
Current	10A(UL)/10A(IEC)	10A(UL)/10A(IEC)	8A(UL)/15A(IEC)	8A(UL)/15A(IEC)	12A(UL)/18A(IEC)
Wire	24-18AWG,1.0mm ²	24-18AWG,1.0mm ²	26-14AWG,2.5mm ²	26-14AWG,2.5mm ²	28-14AWG,1.5mm ²
Pritch	3.5/3.96mm	3.5/3.96mm	5.0mm	5.0mm	5.0mm
Poles	2-24P	2-24P	2-24P	2-24P	2-24P


Product parameters					
Model	EX/JM332K-5.0	EX/JM332J-5.0	EX/JM333K-3.5	EX/JM333J-3.5	EX/JM166-5.0
Voltage	300V(UL)/250V(IEC)	300V(UL)/250V(IEC)	300V(UL)/250V(IEC)	300V(UL)/250V(IEC)	300V(UL)/250V(IEC)
Current	10A(UL)/18A(IEC)	10A(UL)/18A(IEC)	8A(UL)/8A(IEC)	8A(UL)/8A(IEC)	15A(UL)/24A(IEC)
Wire	28-16AWG,1.5mm ²	/	24-18AWG,1.0mm ²	/	26-14AWG,2.5mm ²
Pritch	5.0mm	5.0mm	3.5mm	3.5mm	5.0mm
Poles	2-24P	2-24P	2-24P	2-24P	2-24P

Bornes


Product parameters					
Model	EX/JM381-3.5/3.81	EX/JM381H-3.5/3.81	EX/JM381A-3.5/3.81	EX/JM381B-3.5/3.81	EX/JM127V-5.0/5.08
Voltage	300V(UL)/250V(IEC)	300V(UL)/250V(IEC)	300V(UL)/250V(IEC)	300V(UL)/250V(IEC)	300V(UL)/250V(IEC)
Current	15A(UL)/15A(IEC)	15A(UL)/15A(IEC)	15A(UL)/15A(IEC)	15A(UL)/15A(IEC)	12A(UL)/15A(IEC)
Wire	30-14AWG,1.5mm²	30-14AWG,1.5mm²	30-14AWG,1.5mm²	30-14AWG,1.5mm²	26-14AWG,1.5mm²
Pritch	3.5/3.81mm	3.5/3.81mm	3.5/3.81mm	3.5/3.81mm	5.0/5.08mm
Poles	2-24P	2-24P	2-24P	2-24P	2-24P

Product parameters					
Model	EX/JM127R-5.0/5.08	EX/JM127A-5.0/5.08	EX/JM127B-5.0/5.08	EX/JM128V-5.0/5.08	EX/JM128R-5.0/5.08
Voltage	300V(UL)/250V(IEC)	300V(UL)/250V(IEC)	300V(UL)/250V(IEC)	300V(UL)/250V(IEC)	300V(UL)/250V(IEC)
Current	12A(UL)/15A(IEC)	12A(UL)/15A(IEC)	12A(UL)/15A(IEC)	10A(UL)/20A(IEC)	10A(UL)/20A(IEC)
Wire	26-14AWG,1.5mm²	26-14AWG,1.5mm²	26-14AWG,1.5mm²	22-12AWG,2.5mm²	22-12AWG,2.5mm²
Pritch	5.0/5.08mm	5.0/5.08mm	5.0/5.08mm	5.0/5.08mm	5.0/5.08mm
Poles	2-24P	2-24P	2-24P	2-24P	2-24P

Product parameters					
Model	EX/JM128V-7.5/7.62	EX/JM128R-7.5/7.62	EX/JM500-5.0/5.08	EX/JM500H-5.0/5.08	EX/JM500HH-5.0/5.08
Voltage	300V(UL)/250V(IEC)	300V(UL)/250V(IEC)	300V(UL)/250V(IEC)	300V(UL)/250V(IEC)	300V(UL)/250V(IEC)
Current	10A(UL)/18A(IEC)	10A(UL)/18A(IEC)	10A(UL)/18A(IEC)	10A(UL)/18A(IEC)	10A(UL)/18A(IEC)
Wire	22-12AWG,2.5mm²	22-12AWG,2.5mm²	30-14AWG,2.5mm²	30-14AWG,2.5mm²	30-14AWG,2.5mm²
Pritch	7.5/7.62mm	7.5/7.62mm	5.0/5.08mm	5.0/5.08mm	5.0/5.08mm
Poles	2-24P	2-24P	2-24P	2-24P	2-24P

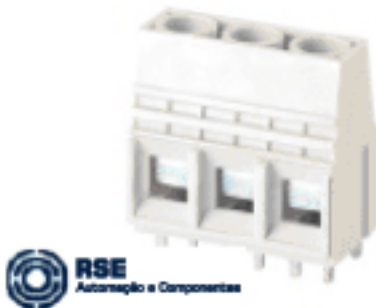
Product parameters					
Model	EX/JM500A-5.0/5.08	EX/JM500B-5.0/5.08	EX/JM500AA-5.0/5.08	EX/JM500BB-5.0/5.08	EX/JM500A3-5.0/5.08
Voltage	300V(UL)/250V(IEC)	300V(UL)/250V(IEC)	300V(UL)/250V(IEC)	300V(UL)/250V(IEC)	300V(UL)/250V(IEC)
Current	10A(UL)/18A(IEC)	10A(UL)/18A(IEC)	10A(UL)/18A(IEC)	10A(UL)/18A(IEC)	10A(UL)/18A(IEC)
Wire	30-14AWG,2.5mm²	30-14AWG,2.5mm²	30-14AWG,2.5mm²	30-14AWG,2.5mm²	30-14AWG,2.5mm²
Pritch	5.0/5.08mm	5.0/5.08mm	5.0/5.08mm	5.0/5.08mm	5.0/5.08mm
Poles	2-24P	2-24P	2-24P	2-24P	2-24P

Bornes

Product parameters					
Model	EX/JM130A-5.0/5.08	EX/JM130B-5.0/5.08	EX/JM103-5.0	EX/JM104-5.08	EX/JM105V-5.0
Voltage	300V(UL)/250V(IEC)	300V(UL)/250V(IEC)	300V(UL)/250V(IEC)	300V(UL)/250V(IEC)	EX/JM105V-5.0
Current	20A(UL)/24A(IEC)	20A(UL)/24A(IEC)	15A(UL)/24A(IEC)	15A(UL)/24A(IEC)	20A(UL)/24A(IEC)
Wire	26-12AWG,2.5mm ²	26-12AWG,2.5mm ²	24-12AWG,2.5mm ²	24-12AWG,2.5mm ²	24-14AWG,2.5mm ²
Pritch	5.0/5.08mm	5.0/5.08mm	5.0mm	5.08mm	5.0mm
Poles	2-24P	2-24P	2-24P	2-24P	2-24P

Product parameters					
Model	EX/JM105R-5.0	EX/JM127S-5.08	EX/JM632V-5.0	EX/JM632R-5.0	EX/JM635-6.35
Voltage	300V(UL)/450V(IEC)	300V(UL)/250V(IEC)	300V(UL)/130V(IEC)	300V(UL)/130V(IEC)	300V(UL)/450V(IEC)
Current	20A(UL)/24A(IEC)	12A(UL)/24A(IEC)	12A(UL)/10A(IEC)	12A(UL)/10A(IEC)	30A(UL)/32A(IEC)
Wire	24-14AWG,2.5mm ²	26-14AWG,1.5mm ²	26-16AWG,1.0mm ²	26-16AWG,1.0mm ²	26-10AWG,4.0mm ²
Pritch	5.0mm	5.08mm	5.0mm	5.0mm	6.35mm
Poles	2-24P	2-24P	2-24P	2-24P	2-24P

Product parameters					
Model	EX/JM635-7.62	EX/JM636-6.35	EX/JM950-9.5	EX/JM135T-10.16	EX/JM136T-10.16
Voltage	300V(UL)/450V(IEC)	300V(UL)/250V(IEC)	300V(UL)/630V(IEC)	300V(UL)/750V(IEC)	300V(UL)/1000V(IEC)
Current	30A(UL)/32A(IEC)	30A(UL)/32A(IEC)	30A(UL)/32A(IEC)	52A(UL)/57A(IEC)	60A(UL)/65A(IEC)
Wire	26-10AWG,4.0mm ²	26-10AWG,4.0mm ²	26-10AWG,4.0mm ²	22-6AWG,10mm ²	22-6AWG,10mm ²
Pritch	7.62mm	6.35mm	9.5mm	10.16mm	10.16mm
Poles	2-24P	2-24P	2-24P	2-24P	2-24P

Product parameters					
Model	EX/JM136HT-10.16	EX/JM1016-10.16	EX/JM136HT-12.7	EX/JM1270-12.7	EX/JM137T-15.0
Voltage	300V(UL)/1000V(IEC)	600V(UL)/1000V(IEC)	600V(UL)/1000V(IEC)	600V(UL)/1000V(IEC)	600V(UL)/1000V(IEC)
Current	60A(UL)/57A(IEC)	60A(UL)/57A(IEC)	60A(UL)/57A(IEC)	60A(UL)/57A(IEC)	115A(UL)/125A(IEC)
Wire	22-6AWG,10mm ²	22-6AWG,10mm ²	22-6AWG,16mm ²	20-6AWG,10mm ²	22-2AWG,35mm ²
Pritch	10.16mm	10.16mm	12.7mm	12.7mm	15.0mm
Poles	2-24P	2-24P	2-24P	2-24P	2-24P



Bornes

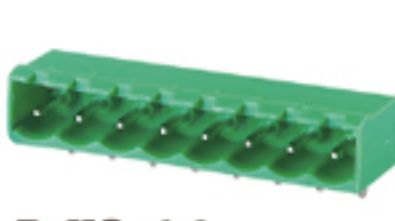
Product parameters					
Model	15EDGKA-3.5/3.81	15EDGKAM-3.5/3.81	15EDGKB-3.5/3.81	15EDGKBM-3.5/3.81	15EDGKC-3.5/3.81
Voltage	300V(UL)/250V(IEC)	300V(UL)/250V(IEC)	300V(UL)/250V(IEC)	300V(UL)/250V(IEC)	300V(UL)/250V(IEC)
Current	8A(UL)/10A(IEC)	8A(UL)/10A(IEC)	8A(UL)/10A(IEC)	8A(UL)/10A(IEC)	8A(UL)/10A(IEC)
Wire	28-16AWG,1.5mm ²	28-16AWG,1.5mm ²	28-16AWG,1.5mm ²	28-16AWG,1.5mm ²	28-16AWG,1.5mm ²
Pritch	3.5/3.81mm	3.5/3.81mm	3.5/3.81mm	3.5/3.81mm	3.5/3.81mm
Poles	2-24P	2-24P	2-24P	2-24P	2-24P

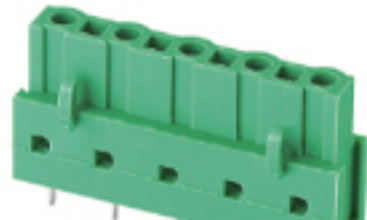
Product parameters					
Model	15EDGKCM-3.5/3.81	15EDGKD-3.5/3.81	15EDGKDM-3.5/3.81	15EDGKN-3.5	15EDGKNM-3.5
Voltage	300V(UL)/250V(IEC)	300V(UL)/250V(IEC)	300V(UL)/250V(IEC)	300V(UL)/250V(IEC)	300V(UL)/250V(IEC)
Current	8A(UL)/10A(IEC)	8A(UL)/10A(IEC)	8A(UL)/10A(IEC)	8A(UL)/10A(IEC)	8A(UL)/10A(IEC)
Wire	28-16AWG,1.5mm ²	28-16AWG,1.5mm ²	28-16AWG,1.5mm ²	24-16AWG,1.0mm ²	24-16AWG,1.0mm ²
Pritch	3.5/3.81mm	3.5/3.81mm	3.5/3.81mm	3.5mm	3.5mm
Poles	2-24P	2-24P	2-24P	2-24P	2-24P

Product parameters					
Model	15EDGKNG-3.5	15EDGKNH-3.5	15EDGKNHM-3.5	15EDGKNHG-3.5	15EDGKR-3.81
Voltage	300V(UL)/250V(IEC)	300V(UL)/250V(IEC)	300V(UL)/250V(IEC)	300V(UL)/250V(IEC)	300V(UL)/250V(IEC)
Current	8A(UL)/10A(IEC)	8A(UL)/10A(IEC)	8A(UL)/10A(IEC)	8A(UL)/10A(IEC)	8A(UL)/10A(IEC)
Wire	24-16AWG,1.0mm ²	24-16AWG,1.0mm ²	24-16AWG,1.0mm ²	24-16AWG,1.0mm ²	28-16AWG,1.5mm ²
Pritch	3.5mm	3.5mm	3.5mm	3.5mm	3.81mm
Poles	2-24P	2-24P	2-24P	2-24P	2-24P

Product parameters					
Model	15EDGKP-3.81	15EDGKRM-3.81	15EDGK-5.08	15EDGKM-5.08	2EDGK-5.0/5.08
Voltage	300V(UL)/250V(IEC)	300V(UL)/250V(IEC)	300V(UL)/250V(IEC)	300V(UL)/250V(IEC)	300V(UL)/450V(IEC)
Current	8A(UL)/10A(IEC)	8A(UL)/10A(IEC)	8A(UL)/10A(IEC)	8A(UL)/10A(IEC)	15A(UL)/20A(IEC)
Wire	28-16AWG,1.5mm ²	28-16AWG,1.5mm ²	28-16AWG,1.0mm ²	28-16AWG,1.0mm ²	28-14AWG,2.5mm ²
Pritch	3.81mm	3.81mm	5.08mm	5.08mm	5.0/5.08mm
Poles	2-24P	2-24P	2-24P	2-24P	2-24P

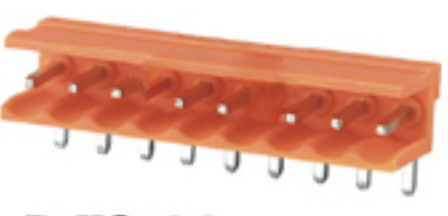
产品参数 Product parameters	 RoHS CE	 RoHS CE	 RoHS CE	 RoHS CE	 RoHS CE
型号 Model	2EDGRTM-5.0/5.08	2EDGVH-5.0/5.08	2EDGVHM-5.0/5.08	2EDGRH-5.0/5.08	2EDGRHM-5.0/5.08
电压 Voltage	300V(UL)/450V(IEC)	300V(UL)/450V(IEC)	300V(UL)/450V(IEC)	300V(UL)/450V(IEC)	300V(UL)/450V(IEC)
电流 Current	15A(UL)/20A(IEC)	15A(UL)/20A(IEC)	15A(UL)/20A(IEC)	15A(UL)/20A(IEC)	15A(UL)/20A(IEC)
线径 Wire	/	/	/	/	/
间距 Pritch	5.0/5.08mm	5.0/5.08mm	5.0/5.08mm	5.0/5.08mm	5.0/5.08mm
位数 Poles	2-24P	2-24P	2-24P	2-24P	2-24P

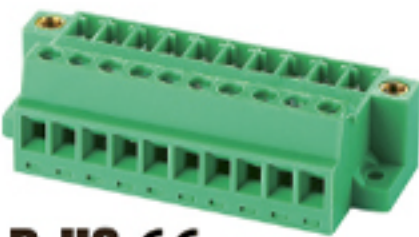
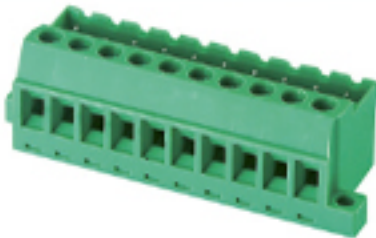
产品参数 Product parameters	 RoHS CE	 RoHS CE	 RoHS CE	 RoHS CE	 RoHS CE
型号 Model	2EDGV-7.5/7.62	2EDGVC-7.5/7.62	2EDGVM-7.5/7.62	2EDGR-7.5/7.62	2EDGRC-7.5/7.62
电压 Voltage	300V(UL)/450V(IEC)	300V(UL)/450V(IEC)	300V(UL)/450V(IEC)	300V(UL)/450V(IEC)	300V(UL)/450V(IEC)
电流 Current	15A(UL)/20A(IEC)	15A(UL)/20A(IEC)	15A(UL)/20A(IEC)	15A(UL)/20A(IEC)	15A(UL)/20A(IEC)
线径 Wire	/	/	/	/	/
间距 Pritch	7.5/7.62mm	7.5/7.62mm	7.5/7.62mm	7.5/7.62mm	7.5/7.62mm
位数 Poles	2-24P	2-24P	2-24P	2-24P	2-24P

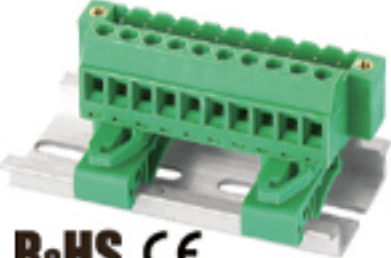
产品参数 Product parameters	 RoHS CE	 RoHS CE	 RoHS CE	 RoHS CE	 RoHS CE
型号 Model	2EDGRM-7.5/7.62	2EDGA-7.5/7.62	2EDGAM-7.5/7.62	2EDGB-7.5/7.62	2EDGBM-7.5/7.62
电压 Voltage	300V(UL)/450V(IEC)	300V(UL)/450V(IEC)	300V(UL)/450V(IEC)	300V(UL)/450V(IEC)	300V(UL)/450V(IEC)
电流 Current	15A(UL)/20A(IEC)	15A(UL)/17.5A(IEC)	15A(UL)/17.5A(IEC)	15A(UL)/17.5A(IEC)	15A(UL)/17.5A(IEC)
线径 Wire	/	/	/	/	/
间距 Pritch	7.5/7.62mm	7.5/7.62mm	7.5/7.62mm	7.5/7.62mm	7.5/7.62mm
位数 Poles	2-24P	2-24P	2-24P	2-24P	2-24P

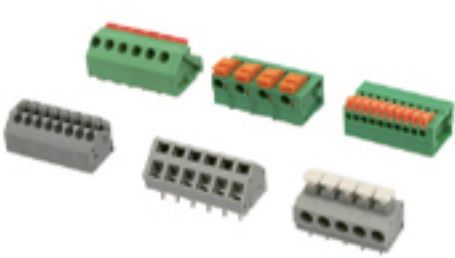
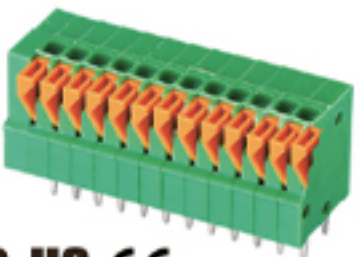
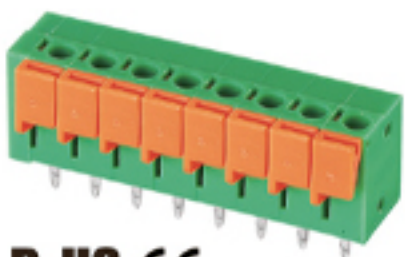
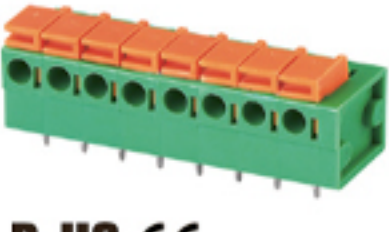
产品参数 Product parameters	 RoHS CE	 RoHS CE	 RoHS CE	 RoHS CE	 RoHS CE
型号 Model	3EDGVC-7.62	3EDGVZM-7.62	3EDGRC-7.62	3EDGRZM-7.62	5EDGVC-10.16
电压 Voltage	300V(UL)/400V(IEC)	300V(UL)/400V(IEC)	300V(UL)/400V(IEC)	300V(UL)/400V(IEC)	300V(UL)/1000V(IEC)
电流 Current	30A(UL)/32A(IEC)	30A(UL)/32A(IEC)	30A(UL)/32A(IEC)	30A(UL)/32A(IEC)	55A(UL)/76A(IEC)
线径 Wire	/	/	/	/	/
间距 Pritch	7.62mm	7.62mm	7.62mm	7.62mm	10.16mm
位数 Poles	2-24P	2-24P	2-24P	2-24P	2-24P

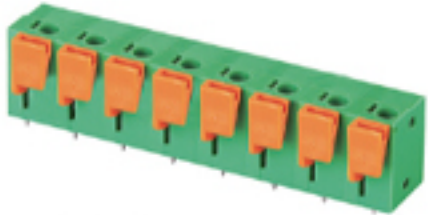
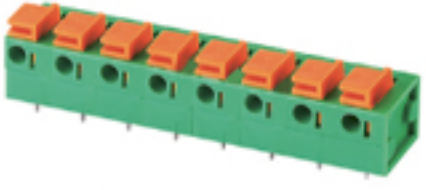
产品参数 Product parameters	 RoHS CE	 RoHS CE	 RoHS CE	 RoHS CE	 RoHS CE
型号 Model	5EDGVM-10.16	5EDGRC-10.16	5EDGRM-10.16	5EDGRR-10.16	5EDGRRM-10.16
电压 Voltage	300V(UL)/1000V(IEC)	300V(UL)/1000V(IEC)	300V(UL)/1000V(IEC)	300V(UL)/1000V(IEC)	300V(UL)/1000V(IEC)
电流 Current	55A(UL)/76A(IEC)	55A(UL)/76A(IEC)	55A(UL)/76A(IEC)	55A(UL)/76A(IEC)	55A(UL)/76A(IEC)
线径 Wire	/	/	/	/	/
间距 Pritch	10.16mm	10.16mm	10.16mm	10.16mm	10.16mm
位数 Poles	2-24P	2-24P	2-24P	2-24P	2-24P

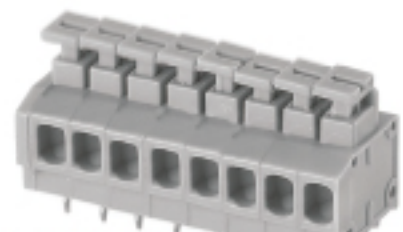
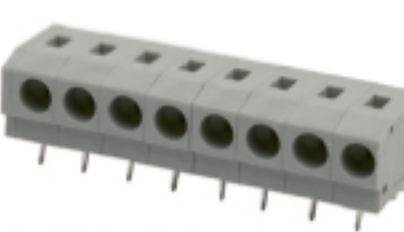
产品参数 Product parameters	 RoHS CE	 RoHS CE	 RoHS CE	 RoHS CE	
型号 Model	HT508V-5.08	HT508R-5.08	HT396V-3.96	HT396R-3.96	5-PCB特殊插拔式 接线端子 SPECIAL TYPE TERMINAL BLOCKS
电压 Voltage	300V(UL)/320V(IEC)	300V(UL)/320V(IEC)	300V(UL)/250V(IEC)	300V(UL)/250V(IEC)	
电流 Current	10A(UL)/15A(IEC)	10A(UL)/15A(IEC)	8A(UL)/10A(IEC)	8A(UL)/10A(IEC)	
线径 Wire	/	/	/	/	
间距 Pritch	5.08mm	5.08mm	3.96mm	3.96mm	
位数 Poles	2-24P	2-24P	2-24P	2-24P	

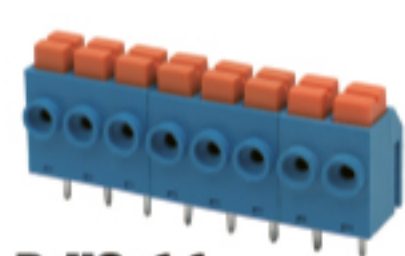
产品参数 Product parameters	 RoHS CE	 RoHS CE	 RoHS CE	 RoHS CE	 RoHS CE
型号 Model	15EDGGB-3.81	15EDGGBM-3.81	2EDGGB-5.08	2EDGGBM-5.08	2EDGGBM-5.08
电压 Voltage	300V(UL)/250V(IEC)	300V(UL)/250V(IEC)	300V(UL)/450V(IEC)	300V(UL)/450V(IEC)	300V(UL)/450V(IEC)
电流 Current	8A(UL)/7A(IEC)	8A(UL)/7A(IEC)	15A(UL)/20A(IEC)	15A(UL)/20A(IEC)	15A(UL)/20A(IEC)
线径 Wire	28-16AWG,1.5mm ²	28-16AWG,1.5mm ²	28-14AWG,2.5mm ²	28-14AWG,2.5mm ²	28-14AWG,2.5mm ²
间距 Pritch	3.81mm	3.81mm	5.08mm	5.08mm	5.08mm
位数 Poles	2-24P	2-24P	2-24P	2-24P	2-24P

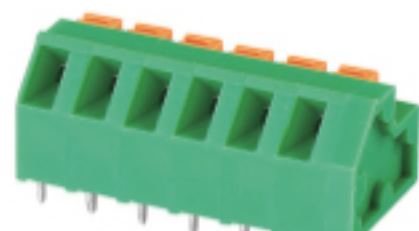
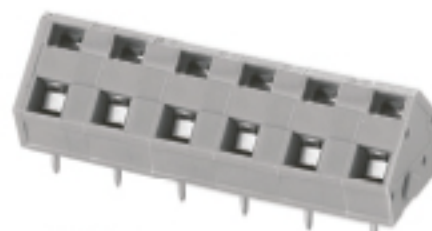
产品参数 Product parameters	 RoHS CE	 RoHS CE	 RoHS CE	 RoHS CE	 RoHS CE
型号 Model	2EDGVKM-5.08	2EDGUVK-5.08	2EDGUVKM-5.08	2EDGRK-5.0/5.08	2EDGURK-5.0/5.08
电压 Voltage	300V(UL)/450V(IEC)	300V(UL)/450V(IEC)	300V(UL)/450V(IEC)	300V(UL)/450V(IEC)	300V(UL)/450V(IEC)
电流 Current	15A(UL)/20A(IEC)	15A(UL)/20A(IEC)	15A(UL)/20A(IEC)	15A(UL)/20A(IEC)	15A(UL)/20A(IEC)
线径 Wire	28-14AWG,2.5mm ²	28-14AWG,2.5mm ²	28-14AWG,2.5mm ²	28-14AWG,2.5mm ²	28-14AWG,2.5mm ²
间距 Pritch	5.08mm	5.08mm	5.08mm	5.0/5.08mm	5.0/5.08mm
位数 Poles	2-24P	2-24P	2-24P	2-24P	2-24P

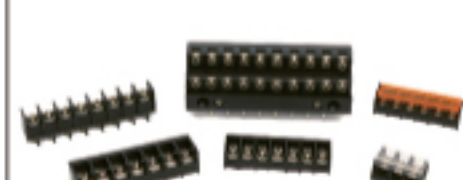
产品参数 Product parameters		 RoHS CE	 RoHS CE	 RoHS CE	 RoHS CE
型号 Model	6-PCB免螺丝式 接线端子 PCB SPRING TERMINAL BLOCKS	EX/JM141V-2.54	EX/JM141R-2.54	EX/JM142V-5.0/5.08	EX/JM142R-5.0/5.08
电压 Voltage		150V(UL)130V(IEC)	150V(UL)130V(IEC)	300V(UL)250V(IEC)	300V(UL)250V(IEC)
电流 Current		2A(UL)/6A(IEC)	2A(UL)/6A(IEC)	10A(UL)/15A(IEC)	10A(UL)/15A(IEC)
线径 Wire		26-18AWG,1.0mm ²	26-18AWG,1.0mm ²	24-14AWG,1.5mm ²	24-14AWG,1.5mm ²
间距 Pritch		2.54mm	2.54mm	5.0/5.08mm	5.0/5.08mm
位数 Poles		2-24P	2-24P	2-24P	2-24P

产品参数 Product parameters	 RoHS CE	 RoHS CE	 RoHS CE	 RoHS CE	 RoHS CE
型号 Model	EX/JM142V-7.62	EX/JM142R-7.62	EX/JM211V-2.54	EX/JM211R-2.54	EX/JM211V-5.0
电压 Voltage	300V(UL)250V(IEC)	300V(UL)250V(IEC)	150V(UL)130V(IEC)	150V(UL)130V(IEC)	300V(UL)250V(IEC)
电流 Current	10A(UL)/15A(IEC)	10A(UL)/15A(IEC)	5A(UL)/6A(IEC)	5A(UL)/6A(IEC)	10A(UL)/15A(IEC)
线径 Wire	24-14AWG,1.5mm ²	24-14AWG,1.5mm ²	26-18AWG,1.0mm ²	26-18AWG,1.0mm ²	26-16AWG,1.5mm ²
间距 Pritch	7.62mm	7.62mm	2.54mm	2.54mm	5.0mm
位数 Poles	2-24P	2-24P	2-24P	2-24P	2-24P

产品参数 Product parameters	 RoHS CE	 RoHS CE	 RoHS CE	 RoHS CE	 RoHS CE
型号 Model	EX/JM211R-5.0	EX/JM235A-3.81	EX/JM235A-5.0	EX/JM235RA-5.0	EX/JM250-2.5
电压 Voltage	300V(UL)250V(IEC)	300V(UL)250V(IEC)	300V(UL)250V(IEC)	300V(UL)250V(IEC)	300V(UL)250V(IEC)
电流 Current	10A(UL)/15A(IEC)	5A(UL)/15A(IEC)	10A(UL)/15A(IEC)	10A(UL)/15A(IEC)	4A(UL)/6A(IEC)
线径 Wire	26-16AWG,1.5mm ²	22-18AWG,1.0mm ²	22-18AWG,1.0mm ²	22-18AWG,1.0mm ²	28-20AWG,0.5mm ²
间距 Pritch	5.0mm	3.81mm	5.0mm	5.0mm	2.5mm
位数 Poles	2-24P	2-24P	2-24P	2-24P	2-24P

产品参数 Product parameters	 RoHS CE	 RoHS CE	 RoHS CE	 RoHS CE	 RoHS CE
型号 Model	EX/JM250-3.5	EX/JM390-5.0	EX/JM243A-5.0	EX/JM245-5.0/5.08	EX/JM245T2-5.0/5.08
电压 Voltage	300V(UL)450V(IEC)	300V(UL)250V(IEC)	300V(UL)450V(IEC)	300V(UL)450V(IEC)	300V(UL)450V(IEC)
电流 Current	7A(UL)/8A(IEC)	8A(UL)/10A(IEC)	10A(UL)/15A(IEC)	10A(UL)/15A(IEC)	10A(UL)/15A(IEC)
线径 Wire	26-16AWG,1.5mm ²	22-18AWG,1.0mm ²	26-14AWG,15mm ²	26-14AWG,1.5mm ²	28-14AWG,1.5mm ²
间距 Pritch	3.5mm	5.0mm	5.0mm	5.0/5.08mm	5.0/5.08mm
位数 Poles	2-24P	2-24P	2-24P	2-24P	2-24P

产品参数 Product parameters	 RoHS CE	 RoHS CE	 RoHS CE	 RoHS CE	 RoHS CE
型号 Model	EX/JM237-5.08	EX/JM245-7.5	EX/JM245-10.0	EX/JM250-5.0	EX/JM250-7.5
电压 Voltage	300V(UL)300V(IEC)	300V(UL)450V(IEC)	300V(UL)450V(IEC)	300V(UL)400V(IEC)	300V(UL)400V(IEC)
电流 Current	10A(UL)/10A(IEC)	15A(UL)/17A(IEC)	15A(UL)/17A(IEC)	8A(UL)/9A(IEC)	10A(UL)/9A(IEC)
线径 Wire	22-16AWG,1.5mm ²	28-12AWG,2.5mm ²	28-12AWG,2.5mm ²	20-16AWG,0.75mm ²	20-14AWG,0.75mm ²
间距 Pritch	5.08mm	7.5mm	10.0mm	5.0mm	7.5mm
位数 Poles	2-24P	2-24P	2-24P	2-24P	2-24P

产品参数 Product parameters	 RoHS CE	 RoHS CE	 RoHS CE	 RoHS CE	
型号 Model	EX/JM202-5.0	EX/JM202-7.5	7-栅栏式 接线端子 BARRIER TERMINAL BLOCKS	EX/JM25C-7.62	EX/JM25CM-7.62
电压 Voltage	300V(UL)250V(IEC)	300V(UL)250V(IEC)		300V(UL)/450V(IEC)	300V(UL)/450V(IEC)
电流 Current	12A(UL)/16A(IEC)	12A(UL)/16A(IEC)		15A(UL)/17.5A(IEC)	15A(UL)/17.5A(IEC)
线径 Wire	20-12AWG,2.5mm ²	20-12AWG,2.5mm ²		22-14AWG,1.5mm ²	22-14AWG,1.5mm ²
间距 Pritch	5.0mm	7.5mm		7.62mm	7.62mm
位数 Poles	2-24P	2-24P		2-24P	2-24P