

CATÁLOGO DE PRODUTOS RSE

PRODUTO: **PRENSA CABOS**



RSE

Automação e Componentes Eletrônicos

PRENSA CABOS




编 号 ITEM.NO.	D1	D2	B1	L1	L4	范 围 Cable range
M12×1.5	12	8.3	6	7.9	13.3	3-6.5
M16×1.5	16	10.9	9.6	15	15.8	5-10
M20S×1.5	20	14.8	12.5	15	18.4	6-12
M20×1.5	20	15.5	14.5	15	19.5	10-14
M25×1.5	25	21	18.4	15	22.3	13-18
M32×1.5	32	26	26.2	15	24.8	18-25
M40×1.5	40	33	33.4	18	31.6	25-32
M50×1.5	50	42.5	36.5	18	31.6	30-38
M63×1.5	63	54.1	44	18.5	32.6	34-44



Nylon cable glands(metric)

- Threaded entry: Metric
- Color : black and grey
- Working temperature: -40℃-100℃, the item can also endure 120℃ instantly
- protection: IP68
- Standard: IEC698

ITEM.NO.	Threaded entry metric (mm)	Cable range ϕ (mm)	D1	D2	Panel mounting hole (mm)	L1	L2	A (mm)
MG-12	M12×1.25	7.6-4.6	12	M16×1.5	12.5	8.5	16	19
MG-16	M16×1.5	10-6	16	M20×1.5	16.5	15	19.5	24
MG-20	M20×1.5	14-9	20	M25×1.5	20.5	15	21.5	30
MG-25	M25×1.5	18-13	25	M31×2	25.5	15	24.5	36
MG-32	M32×1.5	25-18	32	M38×2	33	15	27.5	46
MG-40	M40×1.5	30-24	40	M46×2	41	20	31	54
MG-50	M50×1.5	39-30	50	M58×2	51	23	37	67
MG-63	M63×1.5	48.5-40	63	M72×2	64	24	42	81.5

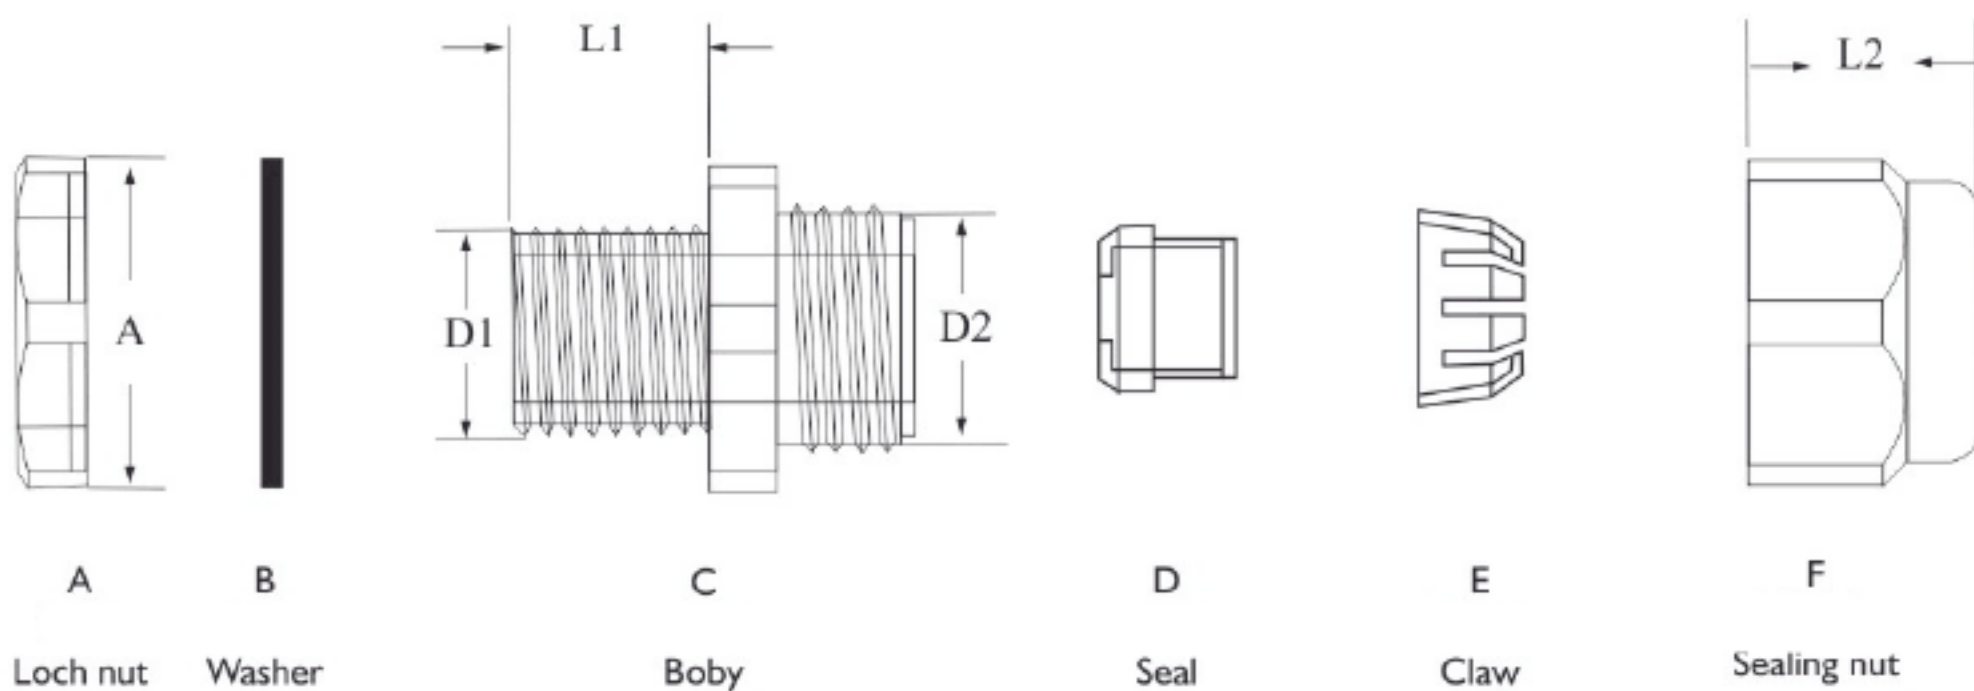

Nylon Cable Glands



Nylon cable glands

- Material: made from UL Nylon 66, 94V-2 and tight ring from rubber.
- Feature:
 1. Special designation, good strength and none damage to electrical machine.
 2. not need to dismetgrate the fix terminal, cable can be inserted through directly then tighten easy and save time.
- Application: used for machinery control box, distribution plate, machine and electrical, etc.

ITEM.NO.	D1	D2	L1	L2	L3	L4	B1	Cable range
PG-07	12.1	8.7	8.3	5	15.0	13.8	6.9	3.5-6
PG-09	16.2	11.1	8.7	4.6	16.1	15.7	8.9	4-8
PG-11	18.2	13.4	8.7	5.1	18.1	17.9	11.3	5-10
PG-13.5	20.1	15.5	8.9	5.0	19.2	18.3	12.8	6-12
PG-16	22.3	17.6	11.3	5.2	20.2	18.1	13.7	10-14
PG-19	24.1	19.1	11.1	5.1	21.1	20.5	15.8	12-15
PG-21	26.7	21.4	11.1	5.1	23.0	22.0	17.4	13-18
PG-24	30.1	24.8	12.8	5.8	23.9	23.7	23.1	15-22
PG-29	35.9	28.8	11.9	6.9	24.4	23.5	25.3	18-25
PG-36	46.4	39.1	16.0	7.8	30.7	27.3	31.9	22-32
PG-42	53.9	46.7	15.4	7.9	33.2	28.5	37.1	30-38
PG-48	60.2	52.6	18.0	7.9	35.5	30.3	45.1	34-44
PG-63	70.6	63.9	28.9	8.9	41.4	41.3	49.3	42-54

