

CATÁLOGO DE PRODUTOS RSE

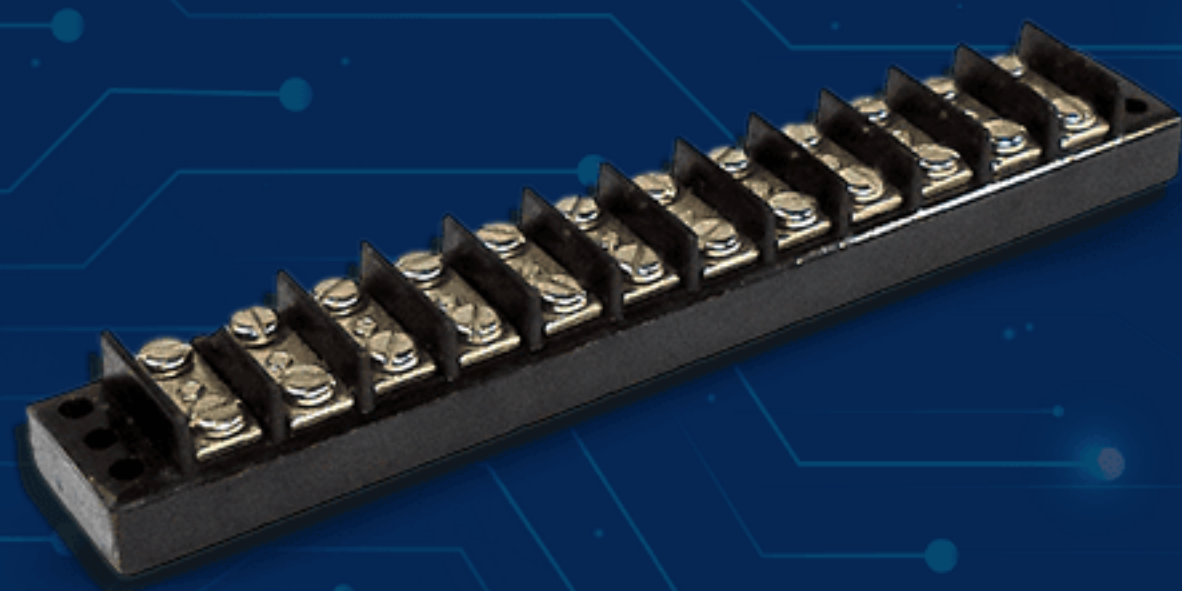
PRODUTO: **TERMINAL BLOCK**



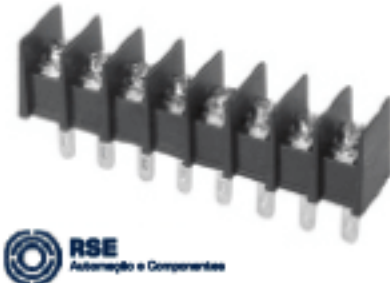
RSE
Automação e Componentes Eletrônicos

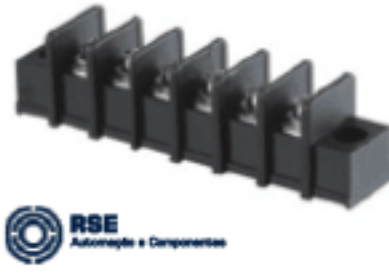
TERMINAL BLOCK

LINHA COMPLETA DE TERMINAIS

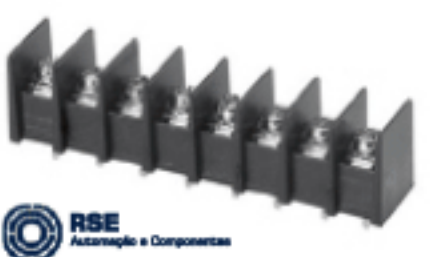
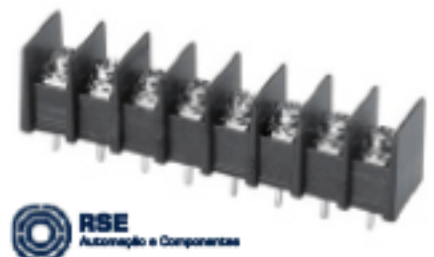


Product parameters					
Model	TERMINAL BLOCKS	EX/JM25C-7.62	EX/JM25CM-7.62	EX/JM25HM-7.62	EX/JM25R-7.62
Voltage		300V(UL)/450V(IEC)	300V(UL)/450V(IEC)	300V(UL)/450V(IEC)	300V(UL)/450V(IEC)
Current		15A(UL)/17.5A(IEC)	15A(UL)/17.5A(IEC)	15A(UL)/17.5A(IEC)	15A(UL)/17.5A(IEC)
Wire		22-14AWG,1.5mm ²	22-14AWG,1.5mm ²	22-14AWG,1.5mm ²	22-14AWG,1.5mm ²
Pitch		7.62mm	7.62mm	7.62mm	7.62mm
Poles		2-24P	2-24P	2-24P	2-24P

Product parameters					
Model	EX/JM35H-8.25	EX/JM35HM-8.25	EX/JM35R-8.25	EX/JM35RM-8.25	EX/JM45C-9.5
Voltage	300V(UL)/450V(IEC)	300V(UL)/450V(IEC)	300V(UL)/450V(IEC)	300V(UL)/450V(IEC)	300V(UL)/750V(IEC)
Current	15A(UL)/24A(IEC)	15A(UL)/24A(IEC)	15A(UL)/24A(IEC)	15A(UL)/24A(IEC)	20A(UL)/32A(IEC)
Wire	22-14AWG,2.5mm ²	22-14AWG,2.5mm ²	22-14AWG,2.5mm ²	22-14AWG,2.5mm ²	22-12AWG,4.0mm ²
Pitch	8.25mm	8.25mm	8.25mm	8.25mm	9.5mm
Poles	2-24P	2-24P	2-24P	2-24P	2-22P

Product parameters					
Model	EX/JM45CM-9.5	EX/JM45S-9.5	EX/JM45SM-9.5	EX/JM45H-9.5	EX/JM45HM-9.5
Voltage	300V(UL)/750V(IEC)	300V(UL)/750V(IEC)	300V(UL)/750V(IEC)	300V(UL)/750V(IEC)	300V(UL)/750V(IEC)
Current	20A(UL)/32A(IEC)	20A(UL)/32A(IEC)	20A(UL)/32A(IEC)	20A(UL)/32A(IEC)	20A(UL)/32A(IEC)
Wire	22-12AWG,4.0mm ²	22-12AWG,4.0mm ²	22-12AWG,4.0mm ²	22-12AWG,4.0mm ²	22-12AWG,4.0mm ²
Pitch	9.5mm	9.5mm	9.5mm	9.5mm	9.5mm
Poles	2-22P	2-22P	2-22P	2-22P	2-22P

Product parameters					
Model	EX/JM45R-9.5	EX/JM45RM-9.5	EX/JM55C-10.0	EX/JM55CM-10.0	EX/JM55S-10.0
Voltage	300V(UL)/750V(IEC)	300V(UL)/750V(IEC)	300V(UL)/750V(IEC)	300V(UL)/750V(IEC)	300V(UL)/750V(IEC)
Current	20A(UL)/32A(IEC)	20A(UL)/32A(IEC)	20A(UL)/32A(IEC)	20A(UL)/32A(IEC)	20A(UL)/32A(IEC)
Wire	22-12AWG,4.0mm ²	22-12AWG,4.0mm ²	22-12AWG,4.0mm ²	22-12AWG,4.0mm ²	22-12AWG,4.0mm ²
Pitch	9.5mm	9.5mm	10.0mm	10.0mm	10.0mm
Poles	2-22P	2-22P	2-24P	2-24P	2-24P

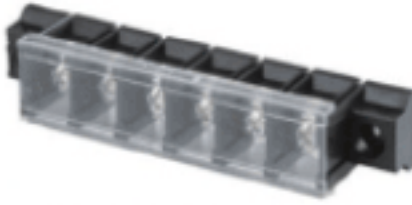
Product parameters	 	 	 	 	 
Model	EX/JM65C-11.0	EX/JM65CM-11.0	EX/JM65S-11.0	EX/JM65SM-11.0	EX/JM65H-11.0
Voltage	300V(UL)/450V(IEC)	300V(UL)/450V(IEC)	300V(UL)/450V(IEC)	300V(UL)/450V(IEC)	300V(UL)/450V(IEC)
Current	20A(UL)/32A(IEC)	20A(UL)/32A(IEC)	20A(UL)/32A(IEC)	20A(UL)/32A(IEC)	20A(UL)/32A(IEC)
Wire	22-12AWG,4.0mm ²	22-12AWG,4.0mm ²	22-12AWG,4.0mm ²	22-12AWG,4.0mm ²	22-12AWG,4.0mm ²
Pritch	11.0mm	11.0mm	11.0mm	11.0mm	11.0mm
Poles	2-24P	2-24P	2-24P	2-24P	2-24P

Product parameters	 	 	 	 	 
Model	EX/JM65HM-11.0	EX/JM65R-11.0	EX/JM65RM-11.0	EX/JM28C-7.62	EX/JM28CM-7.62
Voltage	300V(UL)/450V(IEC)	300V(UL)/450V(IEC)	300V(UL)/450V(IEC)	300V(UL)/250V(IEC)	300V(UL)/250V(IEC)
Current	20A(UL)/32A(IEC)	20A(UL)/32A(IEC)	20A(UL)/32A(IEC)	15A(UL)/24A(IEC)	15A(UL)/24A(IEC)
Wire	22-12AWG,4.0mm ²	22-12AWG,4.0mm ²	22-12AWG,4.0mm ²	22-14AWG,2.5mm ²	22-14AWG,2.5mm ²
Pritch	11.0mm	11.0mm	11.0mm	7.62mm	7.62mm
Poles	2-24P	2-24P	2-24P	2-24P	2-24P

Product parameters	 	 	 	 	 
Model	EX/JM28S-7.62	EX/JM28SM-7.62	EX/JM28H-7.62	EX/JM28HM-7.62	EX/JM28R-7.62
Voltage	300V(UL)/250V(IEC)	300V(UL)/250V(IEC)	300V(UL)/250V(IEC)	300V(UL)/250V(IEC)	300V(UL)/250V(IEC)
Current	15A(UL)/24A(IEC)	15A(UL)/24A(IEC)	15A(UL)/24A(IEC)	15A(UL)/24A(IEC)	15A(UL)/24A(IEC)
Wire	22-14AWG,2.5mm ²	22-14AWG,2.5mm ²	22-14AWG,2.5mm ²	22-14AWG,2.5mm ²	22-14AWG,2.5mm ²
Pritch	7.62mm	7.62mm	7.62mm	7.62mm	7.62mm
Poles	2-24P	2-24P	2-24P	2-24P	2-24P

Product parameters	 	 	 	 	 
Model	EX/JM28RM-7.62	EX/JM38C-8.25	EX/JM38CM-8.25	EX/JM38S-8.25	EX/JM38SM-8.25
Voltage	300V(UL)/250V(IEC)	300V(UL)/450V(IEC)	300V(UL)/450V(IEC)	300V(UL)/450V(IEC)	300V(UL)/450V(IEC)
Current	15A(UL)/24A(IEC)	15A(UL)/24A(IEC)	15A(UL)/24A(IEC)	15A(UL)/24A(IEC)	15A(UL)/24A(IEC)
Wire	22-14AWG,2.5mm ²	22-14AWG,2.5mm ²	22-14AWG,2.5mm ²	22-14AWG,2.5mm ²	22-14AWG,2.5mm ²
Pritch	7.62mm	8.25mm	8.25mm	8.25mm	8.25mm
Poles	2-24P	2-24P	2-24P	2-24P	2-24P

Product parameters					
Model	EX/JM48CM-9.5	EX/JM48S-9.5	EX/JM48SM-9.5	EX/JM48H-9.5	EX/JM48HM-9.5
Voltage	300V(UL)/750V(IEC)	300V(UL)/750V(IEC)	300V(UL)/750V(IEC)	300V(UL)/750V(IEC)	300V(UL)/750V(IEC)
Current	20A(UL)/32A(IEC)	20A(UL)/32A(IEC)	20A(UL)/32A(IEC)	20A(UL)/32A(IEC)	20A(UL)/32A(IEC)
Wire	22-12AWG,4.0mm ²	22-12AWG,4.0mm ²	22-12AWG,4.0mm ²	22-12AWG,4.0mm ²	22-12AWG,4.0mm ²
Pritch	9.5mm	9.5mm	9.5mm	9.5mm	9.5mm
Poles	2-22P	2-22P	2-22P	2-22P	2-22P

Product parameters					
Model	EX/JM48R-9.5	EX/JM48RM-9.5	EX/JM58C-10.0	EX/JM58CM-10.0	EX/JM58S-10.0
Voltage	300V(UL)/750V(IEC)	300V(UL)/750V(IEC)	300V(UL)/750V(IEC)	300V(UL)/750V(IEC)	300V(UL)/750V(IEC)
Current	20A(UL)/32A(IEC)	20A(UL)/32A(IEC)	20A(UL)/32A(IEC)	20A(UL)/32A(IEC)	20A(UL)/32A(IEC)
Wire	22-12AWG,4.0mm ²	22-12AWG,4.0mm ²	22-12AWG,4.0mm ²	22-12AWG,4.0mm ²	22-12AWG,4.0mm ²
Pritch	9.5mm	9.5mm	10.0mm	10.0mm	10.0mm
Poles	2-22P	2-22P	2-24P	2-24P	2-24P

Product parameters					
Model	EX/JM58SM-10.0	EX/JM58H-10.0	EX/JM58HM-10.0	EX/JM58R-10.0	EX/JM58RM-10.0
Voltage	300V(UL)/750V(IEC)	300V(UL)/750V(IEC)	300V(UL)/750V(IEC)	300V(UL)/750V(IEC)	300V(UL)/750V(IEC)
Current	20A(UL)/32A(IEC)	20A(UL)/32A(IEC)	20A(UL)/32A(IEC)	20A(UL)/32A(IEC)	20A(UL)/32A(IEC)
Wire	22-12AWG,4.0mm ²	22-12AWG,4.0mm ²	22-12AWG,4.0mm ²	22-12AWG,4.0mm ²	22-12AWG,4.0mm ²
Pritch	10.0mm	10.0mm	10.0mm	10.0mm	10.0mm
Poles	2-24P	2-24P	2-24P	2-24P	2-24P

Product parameters					
Model	EX/JM78C-13.0	EX/JM78CM-13.0	EX/JM78S-13.0	EX/JM78SM-13.0	EX/JM78H-13.0
Voltage	600V(UL)/750V(IEC)	600V(UL)/750V(IEC)	600V(UL)/750V(IEC)	600V(UL)/750V(IEC)	600V(UL)/750V(IEC)
Current	40A(UL)/41A(IEC)	40A(UL)/41A(IEC)	40A(UL)/41A(IEC)	40A(UL)/41A(IEC)	40A(UL)/41A(IEC)
Wire	18-10AWG,6.0mm ²	18-10AWG,6.0mm ²	18-10AWG,6.0mm ²	18-10AWG,6.0mm ²	18-10AWG,6.0mm ²
Pritch	13.0mm	13.0mm	13.0mm	13.0mm	13.0mm
Poles	2-20P	2-20P	2-20P	2-20P	2-20P